


EJOT® Frame anchor Type RA-P

Particularly suited for

- Direct fastening of plastic windows in brick work and concrete without plug
- Efficient distance installation of windows and doors
- Installation according to the guidelines of the RAL association for windows and doors

Also suited for

- Direct fastening of components in brick work and concrete without plug

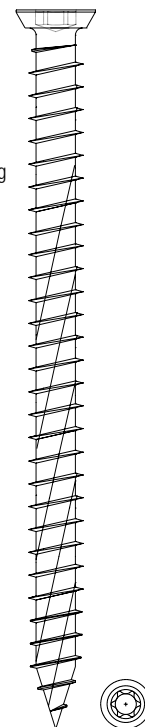

PROPERTIES

- Optimal power transmission and guide through Torx power drive
- Reduced levelling torques and precise fit due to perfect thread geometry
- High installation performance, safe anchorage
- Durable corrosion protection thanks to high-quality galvanic coating
- Includes white cover caps RAL 9010
- Higher durability of screwdriver bits

TECHNICAL DATA

Head diameter..... 11 mm
Drive TORX® T30

INSTALLATION

- Drill Ø 6.2 mm frame holes at the factory or building site, distances according to RAL quality assessments
- Carefully align frame in wall opening
- Drill Ø 6 mm brick holes, drill hole depth = screw-in depth + 10 mm
- Fastening with EJOT frame anchor using standard equipment
- Attach cap if required

APPLICATION

Minimal screw-in depth in:

Concrete..... 30 mm
Sand-lime brick, solid brick..... 40 mm
Vertically perforated brick, lightweight concrete, pumice..... 60 mm

ACCESSORIES

Cover cap

| Drill hole diameter (mm) | Length in mm | Packing unit (pieces) | Order description |
|-------------------------------------|--------------|-----------------------|--------------------|
| Zinc-plated, blue passivated | | | |
| 7.5 | 40 | 1.200 | 310 40 60 1 |
| 7.5 | 50 | 1.200 | 310 50 60 1 |
| 7.5 | 60 | 1.200 | 310 60 60 1 |
| 7.5 | 70 | 1.200 | 310 70 60 1 |
| 7.5 | 80 | 1.200 | 310 80 60 1 |
| 7.5 | 90 | 600 | 310 90 60 1 |
| 7.5 | 100 | 600 | 311 00 60 1 |
| 7.5 | 120 | 600 | 311 20 60 1 |
| 7.5 | 135 | 400 | 311 35 60 1 |
| 7.5 | 150 | 400 | 311 50 60 1 |
| 7.5 | 180 | 400 | 311 80 60 1 |
| 7.5 | 210 | 400 | 312 10 60 1 |

